


Product Dimensions

All dimensions are in inches unless otherwise specified.

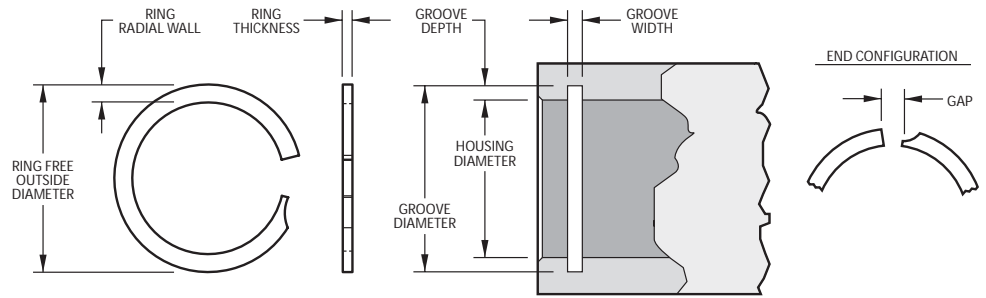

Stock Items available in carbon and stainless steel.

Smalley Part Number ^{1, 4}	Housing Diameter	RING			GROOVE		THRUST CAPACITY	
		Outside Diameter	Radial Wall	Thickness	Diameter	Width	Groove Yield (lb) ²	Ring Shear (lb) ³
FHE-0050	.500	.529	.055	.037	.524	.043	424	2,325
FHE-0056	.562	.591	.055	.037	.586	.043	477	2,613
FHE-0062	.625	.665	.065	.037	.657	.043	707	2,906
FHE-0068	.687	.726	.065	.037	.719	.043	777	3,194
FHE-0075	.750	.797	.075	.037	.790	.043	1,060	3,487
FHE-0081	.812	.860	.075	.037	.852	.043	1,148	3,775
FHE-0087	.875	.924	.075	.037	.915	.043	1,237	4,068
FHE-0093	.937	1.000	.085	.045	.985	.051	1,590	5,334
FHE-0100	1.000	1.058	.085	.045	1.048	.051	1,696	5,693
FHE-0106	1.062	1.121	.094	.045	1.110	.051	1,802	6,045
FHE-0112	1.125	1.192	.094	.045	1.181	.051	2,227	6,404
FHE-0118	1.187	1.252	.094	.045	1.243	.051	2,349	6,757
FHE-0125	1.250	1.336	.094	.045	1.316	.051	2,916	7,116
FHE-0131	1.312	1.391	.094	.045	1.378	.051	3,060	7,469
FHE-0137	1.375	1.470	.128	.057	1.453	.063	3,791	9,307
FHE-0143	1.437	1.529	.128	.057	1.515	.063	3,961	9,727
FHE-0150	1.500	1.592	.128	.057	1.578	.063	4,135	10,153
FHE-0156	1.562	1.687	.158	.067	1.666	.073	5,741	12,400
FHE-0162	1.625	1.746	.158	.067	1.729	.073	5,973	12,901
FHE-0168	1.687	1.808	.158	.067	1.791	.073	6,201	13,393
FHE-0175	1.750	1.885	.158	.067	1.862	.073	6,927	13,893
FHE-0181	1.812	1.942	.158	.067	1.924	.073	7,173	14,385
FHE-0187	1.875	2.007	.158	.067	1.987	.073	7,422	14,885
FHE-0193	1.937	2.074	.200	.076	2.055	.085	8,078	16,649
FHE-0200	2.000	2.143	.200	.076	2.118	.085	8,341	17,191
FHE-0206	2.062	2.200	.200	.076	2.180	.085	8,599	17,724
FHE-0212	2.125	2.264	.200	.076	2.243	.085	8,862	18,265
FHE-0218	2.187	2.327	.200	.076	2.305	.085	9,121	18,798
FHE-0225	2.250	2.389	.200	.076	2.368	.085	9,384	19,340
FHE-0231	2.312	2.453	.200	.076	2.430	.085	9,642	19,873
FHE-0237	2.375	2.517	.200	.076	2.493	.085	9,905	20,414
FHE-0243	2.437	2.582	.200	.076	2.555	.085	10,163	20,947
FHE-0250	2.500	2.643	.200	.076	2.618	.085	10,426	21,488
FHE-0256	2.562	2.705	.200	.095	2.680	.104	10,685	26,225
FHE-0262	2.625	2.777	.200	.095	2.743	.104	10,947	26,870
FHE-0268	2.687	2.828	.200	.095	2.805	.104	11,206	27,504
FHE-0275	2.750	2.899	.200	.095	2.868	.104	11,469	28,149
FHE-0281	2.812	2.958	.200	.095	2.930	.104	11,727	28,784
FHE-0287	2.875	3.022	.200	.095	2.993	.104	11,990	29,429
FHE-0293	2.937	3.084	.200	.095	3.055	.104	12,249	30,063
FHE-0300	3.000	3.145	.200	.095	3.118	.104	12,511	30,708
FHE-0306	3.062	3.218	.200	.095	3.184	.104	13,203	31,343
FHE-0312	3.125	3.294	.237	.095	3.263	.104	15,242	31,988
FHE-0318	3.187	3.357	.237	.095	3.325	.104	15,544	32,622
FHE-0325	3.250	3.420	.237	.095	3.388	.104	15,851	33,267
FHE-0331	3.312	3.483	.248	.115	3.450	.124	16,154	38,952
FHE-0337	3.375	3.547	.248	.115	3.513	.124	16,461	39,693

INTERNAL RETAINING RINGS

¹ Add suffix "-S02" for 302 stainless steel.

² Based on a groove material yield strength of 45,000 psi and a safety factor of 2.

³ Based on a safety factor of 3.

⁴ See pages 106-107 for How to Order.

Manufactured in USA

Smalley Part Number ^{1, 4}	Housing Diameter	RING			GROOVE		THRUST CAPACITY	
		Outside Diameter	Radial Wall	Thickness	Diameter	Width	Groove Yield (lb) ²	Ring Shear (lb) ³
FHE-0343	3.437	3.609	.248	.115	3.575	.124	16,763	40,422
FHE-0350	3.500	3.673	.248	.115	3.638	.124	17,071	41,163
FHE-0356	3.562	3.728	.248	.115	3.700	.124	17,373	41,892
FHE-0362	3.625	3.799	.248	.115	3.763	.124	17,680	42,633
FHE-0368	3.687	3.862	.248	.115	3.825	.124	17,983	43,362
FHE-0375	3.750	3.922	.248	.115	3.888	.124	18,290	44,103
FHE-0381	3.812	3.988	.248	.115	3.950	.124	18,592	44,832
FHE-0387	3.875	4.044	.248	.115	4.013	.124	18,900	45,573
FHE-0393	3.937	4.114	.248	.115	4.075	.124	19,202	46,302
FHE-0400	4.000	4.223	.265	.153	4.158	.163	22,337	60,283
FHE-0412	4.125	4.329	.265	.153	4.283	.163	23,035	62,166
FHE-0425	4.250	4.452	.265	.153	4.408	.163	23,733	64,050
FHE-0437	4.375	4.576	.265	.153	4.533	.163	24,431	65,934
FHE-0450	4.500	4.703	.265	.153	4.658	.163	25,129	67,818
FHE-0462	4.625	4.829	.265	.153	4.783	.163	25,827	69,702
FHE-0475	4.750	4.945	.265	.153	4.908	.163	26,525	71,585
FHE-0487	4.875	5.082	.265	.153	5.033	.163	27,223	73,469
FHE-0500	5.000	5.207	.265	.153	5.158	.163	27,921	75,353
FHE-0525	5.250	5.460	.265	.153	5.408	.163	29,317	79,121
FHE-0550	5.500	5.719	.265	.153	5.658	.163	30,713	82,888
FHE-0575	5.750	5.965	.265	.153	5.908	.163	32,109	86,656
FHE-0600	6.000	6.256	.316	.153	6.196	.163	41,563	90,424
FHE-0625	6.250	6.508	.316	.153	6.446	.163	43,295	94,191
FHE-0650	6.500	6.760	.316	.153	6.696	.163	45,027	97,959
FHE-0675	6.750	7.013	.316	.153	6.946	.163	46,759	101,727
FHE-0700	7.000	7.266	.316	.153	7.196	.163	48,490	105,494
FHE-0725	7.250	7.541	.316	.153	7.446	.163	50,222	109,262
FHE-0750	7.500	7.762	.316	.153	7.696	.163	51,954	113,030
FHE-0775	7.750	8.023	.316	.153	7.946	.163	53,686	116,797
FHE-0800	8.000	8.276	.316	.153	8.196	.163	55,418	120,565
FHE-0825	8.250	8.580	.373	.192	8.486	.203	68,813	147,399
FHE-0850	8.500	8.821	.373	.192	8.736	.203	70,898	151,866
FHE-0875	8.750	9.073	.373	.192	8.986	.203	72,983	156,332
FHE-0900	9.000	9.326	.373	.192	9.236	.203	75,068	160,799
FHE-0925	9.250	9.580	.373	.192	9.486	.203	77,154	165,265
FHE-0950	9.500	9.831	.373	.192	9.736	.203	79,239	169,732
FHE-0975	9.750	10.083	.373	.192	9.986	.203	81,324	174,199
FHE-1000	10.000	10.414	.435	.192	10.314	.203	110,977	178,665
FHE-1025	10.250	10.660	.435	.192	10.564	.203	113,751	183,132
FHE-1050	10.500	10.919	.435	.192	10.814	.203	116,526	187,599
FHE-1075	10.750	11.171	.435	.192	11.064	.203	119,300	192,065
FHE-1100	11.000	11.440	.435	.192	11.314	.203	122,074	196,532

INTERNAL RETAINING RINGS

¹ Add suffix "-S02" for 302 stainless steel.
² Based on a groove material yield strength of 45,000 psi and a safety factor of 2.
³ Based on a safety factor of 3.
⁴ See pages 106-107 for How to Order.